

# NUORO

Recessed  
IP44



Microprisma  
UGR




LED			IP44	 on request	5 years warranty	50,000 hrs L80/B20 Ta=25°C	220-240V 50-60Hz		CE
-----	--	--	------	----------------	---------------------	----------------------------------	---------------------	--	----

## NUORO

NUORO  
Recessed / Plasteboard

LIGHT OUTPUT	up to 3300 lm
EFFICIENCY	up to 122 lm/W
WIRING	ECG, on request: DALI
CCT	3000 - 4000 K
CRI	≥ 80 Ra
MATERIALS	
> Housing	Aluminium
> Diffuser	Opal (PMMA Mat Pattern) or Microprisma UGR
LIGHT DISTRIBUTION	Direct
SURFACE FINISH	Housing - white mat color (RAL9003); other colors on request

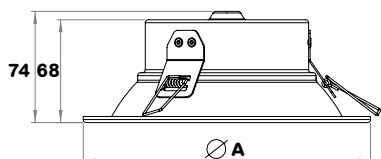

ØA 170mm - mounting hole **145mm**  
 ØA 190mm - mounting hole **165mm**  
 ØA 220mm - mounting hole **195mm**  
 ØA 255mm - mounting hole **230mm**  
 ØA 330mm - mounting hole **305mm**

Netto lm output		CCT	Power	Dimensions (ØA)	Weight	Purchase code
UGR	Opal					
(lm)	(lm)	(K)	(W)	(mm)	(kg)	
1230	1230	3000	12	170	0.40	NUORO.170.12.1230.3K.44
1350	1350	4000	12	170	0.40	NUORO.170.12.1350.4K.44
1680	1680	3000	16	170	0.40	NUORO.170.16.1680.3K.44
1850	1850	4000	16	170	0.40	NUORO.170.16.1850.4K.44
1230	1230	3000	12	190	0.50	NUORO.190.12.1230.3K.44
1350	1350	4000	12	190	0.50	NUORO.190.12.1350.4K.44
1680	1680	3000	16	190	0.50	NUORO.190.16.1680.3K.44
1850	1850	4000	16	190	0.50	NUORO.190.16.1850.4K.44
2200	2200	3000	21	220	0.70	NUORO.220.21.2200.3K.44
2400	2400	4000	21	220	0.70	NUORO.220.21.2400.4K.44
2500	2500	3000	25	220	0.70	NUORO.220.25.2500.3K.44
2700	2700	4000	25	220	0.70	NUORO.220.25.2700.4K.44
2660	2660	3000	25	255	0.90	NUORO.255.25.2660.3K.44
2900	2900	4000	25	255	0.90	NUORO.255.25.2900.4K.44
3050	3050	3000	29	255	0.90	NUORO.255.29.3050.3K.44
3300	3300	4000	29	255	0.90	NUORO.255.29.3300.4K.44
3260	3260	3000	28	330	1.05	NUORO.330.28.3260.3K.44
3590	3590	4000	28	330	1.05	NUORO.330.28.3590.4K.44