


TORPE III

Surface / Suspended / Wall
IP65

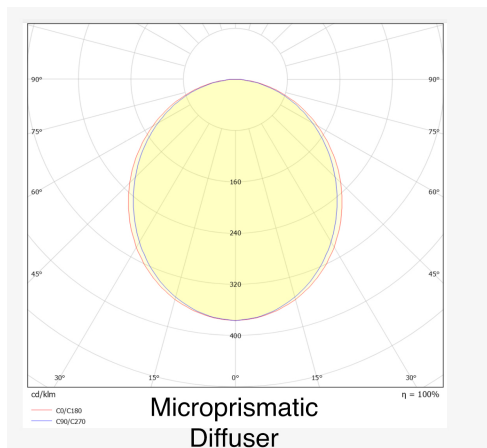

						IP65	LED	5 years warranty	80,000 hrs L80/B20 Ta=25°C	220-240V 50-60Hz		CE
--	--	--	--	--	--	------	-----	------------------	----------------------------------	---------------------	--	----

on request

TORPE III

TORPE III
Surface / Suspended / Wall

LIGHT OUTPUT	up to 5400 lm
EFFICIENCY	up to 136 lm/W
WIRING	ECG, on request: Push dimm, DALI, On request: Emergency kit 3h)
CCT	4000K standard On request: 3000K or 5000K
CRI	CRI80, on request CRI90
MATERIALS	
> Housing	Extruded aluminium profile
> Diffuser	Co-extruded microprisma with silicon gasket
> End caps	Aluminium
LIGHT DISTRIBUTION	Direct
ADVANTAGES	Slim luminaire, DIP switches
SURFACE FINISH	White Ral9003 colour, Black Ral9005 colour or Grey Ral9006
ACCESSORIES	Suspensions, Brackets for surface or wall mounting, Transparent supply cable 3pole or 5pole

