



TORPE III

Surface / Suspended / Wall
IP40




			on request							


TORPE III

TORPE III
Surface / Suspended / Wall


LIGHT OUTPUT	up to 10450 lm
EFFICIENCY	up to 126 lm/W
WIRING	ECG, on request: Push dimm, DALI, On request: Emergency kit 3h)
CCT	3000K or 4000K On request: 5000K
CRI	CRI80, on request CRI90
MATERIALS	
> Housing	Extruded aluminium profile
> Diffuser	Microprisma PC
> End caps	Aluminium
LIGHT DISTRIBUTION	Direct or Direct/Indirect
ADVANTAGES	Slim luminaire, DIP switches
SURFACE FINISH	White Ral9003 colour, Black Ral9005 colour or Grey aluminium
ACCESSORIES	Suspensions, Brackets for surface or wall mounting, Transparent supply cable 3pole or 5pole

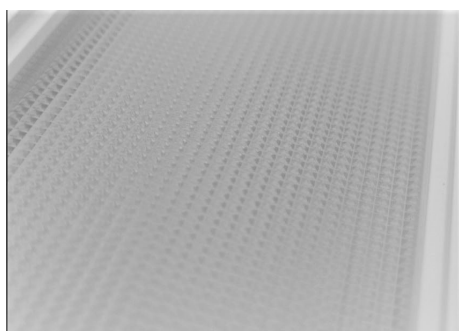

Drawings

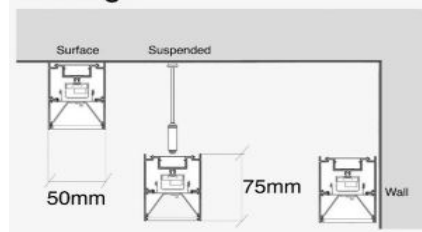

drawing #1

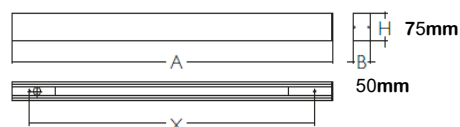

Net lumen output (lm)	CCT (K)	Power (W)	Dimensions (mm)	Weight (kg)	Purchase code
1900	3000	17	A: 567 X:325	2.10	TORPE.60.17.1900.3K.40MI
2100	4000	17	A: 567 X:325	2.10	TORPE.60.17.2100.4K.40MI
2900	3000	26	A: 847 X:605	2.70	TORPE.90.26.2900.3K.40MI
3200	4000	26	A: 847 X:605	2.70	TORPE.90.26.3200.4K.40MI
3740	3000	34	A: 1127 X:885	3.30	TORPE.120.34.3740.3K.40MI
4100	4000	34	A: 1127 X:885	3.30	TORPE.120.34.4100.4K.40MI
4730	3000	43	A: 1407 X:1165	4.10	TORPE.140.43.4730.3K.40MI
5200	4000	43	A: 1407 X:1165	4.10	TORPE.140.43.5200.4K.40MI
5720	3000	51	A: 1687 X:1445	4.90	TORPE.170.51.5720.3K.40MI
6300	4000	51	A: 1687 X:1445	4.90	TORPE.170.51.6300.4K.40MI
7500	3000	68	A: 2250 X:2010	6.00	TORPE.225.68.7500.3K.40MI
8200	4000	68	A: 2250 X:2010	6.00	TORPE.225.68.8200.4K.40MI
4480	3000	40	A: 1127 X:885	3.50	TORPE.120.40.4480.3K.40MI
4900	4000	40	A: 1127 X:885	3.50	TORPE.120.40.4900.4K.40MI
5930	3000	53	A: 1407 X:1165	4.30	TORPE.140.53.5930.3K.40MI
6500	4000	53	A: 1407 X:1165	4.30	TORPE.140.53.6500.4K.40MI
7280	3000	64	A: 1687 X:1445	5.20	TORPE.170.64.7280.3K.40MI
8000	4000	64	A: 1687 X:1445	5.20	TORPE.170.64.8000.4K.40MI
9550	3000	85	A: 2250 X:2010	6.30	TORPE.225.85.9550.3K.40MI
10450	4000	85	A: 2250 X:2010	6.30	TORPE.225.85.10450.4K.40MI

Note: various watt and lumens versions available on request.